




Trincia a parallelogramma con spostamento idraulico



PARALLELOGRAM MULCHER WITH HYDRAULIC SHIFT

Sistema di taglio elicoidale
Helical cutting system

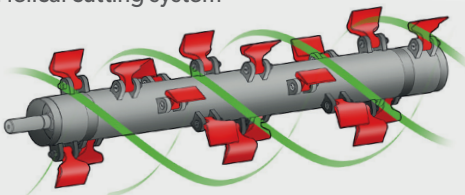

| MOD | | | | | | |
|-----------------|----------|----------|------|--------------|-------------|-----|
| mod. | HP | rpm/min | type | nr (type) | cm | kg |
| TFO 1600 | 40 - 70 | 540/1000 | T-40 | 3 (XPB 1600) | 182×165×105 | 560 |
| TFO 1800 | 40 - 70 | 540/1000 | T-50 | 4 (XPB 1600) | 201×165×105 | 625 |
| TFO 2000 | 50 - 70 | 540/1000 | T-60 | 4 (XPB 1600) | 220×165×105 | 685 |
| TFO 2200 | 60 - 90 | 540/1000 | T-60 | 5 (XPB 1600) | 240×165×105 | 750 |
| TFO 2400 | 70 - 130 | 540/1000 | T-60 | 5 (XPB 1600) | 260×165×105 | 815 |

| MOD | MOVEMENT MACHINE | | | | | | | | | | WORKING WIDTH | | Standard | On request |
|-----------------|------------------|-----|----|-----|-----|-----|-----|-----|-----|-----|---------------|----|----------|------------|
| | | | | | | | | | | | | | | |
| mod. | cm | cm | cm | cm | A | B | C | D | E | cm | nr | nr | nr | |
| TFO 1600 | 109 | 73 | 16 | 166 | 166 | 166 | 182 | 109 | 166 | 160 | 40 | 20 | 14 | |
| TFO 1800 | 109 | 92 | 16 | 185 | 185 | 166 | 201 | 109 | 166 | 180 | 48 | 24 | 16 | |
| TFO 2000 | 109 | 111 | 16 | 204 | 204 | 166 | 220 | 109 | 166 | 200 | 48 | 24 | 18 | |
| TFO 2200 | 109 | 130 | 16 | 223 | 223 | 166 | 239 | 109 | 166 | 220 | 56 | 28 | 19 | |
| TFO 2400 | 109 | 149 | 16 | 242 | 242 | 166 | 258 | 109 | 166 | 240 | 64 | 32 | 21 | |