

CF 16-32-48-64-96-128-192-256

FILTRO TANGENZIALE CROSS FLOW FILTER



EV
ENOVENETA
TECNOLOGIE ENOLOGICHE



FILTRO TANGENZIALE | CROSS FLOW FILTER

CARATTERISTICHE DI SERIE:

- Telaio in acciaio inox AISI 304 su ruote
- Membrane capillari in polipropilene
- Pompa centrifuga di alimentazione con prefiltro
- Pompa centrifuga di ricircolo
- Traduttori di pressione in ingresso e uscita membrane
- Contaltri
- Serbatoio in acciaio inox AISI 304
- PLC con display touch per la gestione completa di tutte le fasi di lavoro, lavaggio e conservazione delle membrane
- Modulo di teleassistenza con scheda ethernet
- Quadro elettrico con voltaggio 400/3/50

ACCESSORI:

- Bancata di filtrazione aggiuntiva
- Modulo di teleassistenza GSM
- Prefiltro autopulente in acciaio inox AISI 316

STANDARD FEATURES:

- AISI 304 stainless steel frame on wheels
- Polypropylene capillary membranes
- Centrifugal feed pump with prefilter
- Centrifugal recirculation pump
- Pressure transducers on membrane' IN and OUT
- Liters counter
- AISI 304 stainless steel tank
- PLC with touch-screen for completely control all working, washing and membranes conservation phases
- Ethernet remote control kit
- 400/3/50 control panel

OPTIONALS:

- Extra membranes module
- GSM remote control kit
- AISI 316 stainless steel self cleaning prefilter



DATI TECNICI | TECHNICAL DATA


		CF 16	CF 32	CF 48	CF 64	CF 96	CF 128	CF 192	CF 256
Numero moduli <i>Modules number</i>	nr.	1	2	3	4	6	8	12	16
Superficie filtrante <i>Filtering surface</i>	m ²	16	32	48	64	96	128	192	256
Portata <i>Flow rate</i>	hl/h	3-15	6-30	9-45	12-60	18-90	24-120	36-180	48-240
Potenza installata <i>Installed power</i>	kW	3.4	10.0	10.5	12.0	18.0	21.0	28.5	36.5

DIMENSIONI | DIMENSIONS

Lunghezza <i>Length</i>	mm	1250	1250	1500	1800	2100	2100	2100	2100
Profondità <i>Depth</i>	mm	1150	1150	1150	1150	1700	1700	2300	2900
Altezza <i>Height</i>	mm	1700	1700	1700	1700	1700	1700	1700	1700
Peso <i>Weight</i>	Kg	500	600	680	760	1000	1160	1600	2000

Foto, dati e misure non sono impegnativi e possono essere variati senza preavviso.

Photos, measurements and operating data are approximative, not legally binding and subject to change without notice.

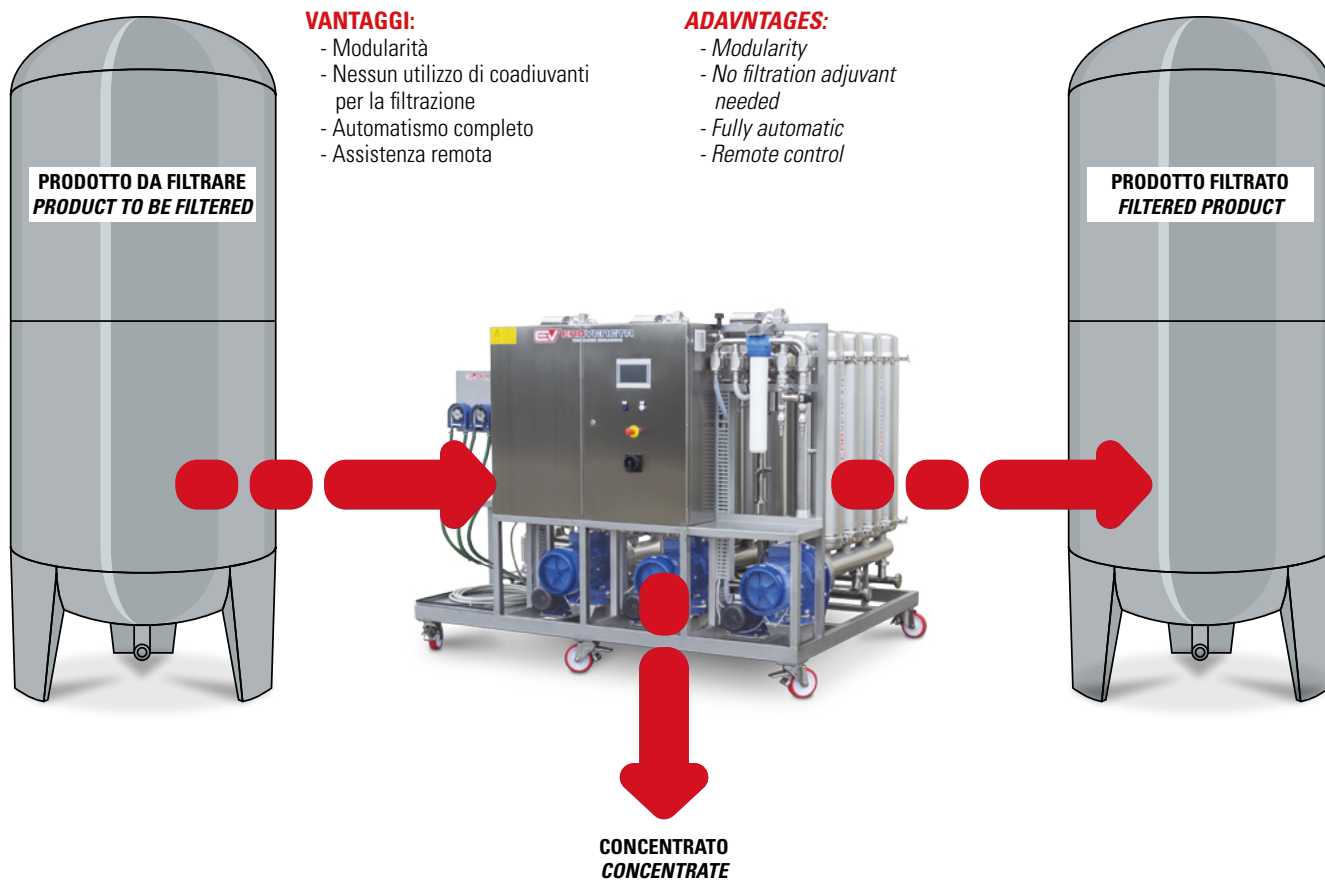



ENOVENETA S.p.A.

Via Marconi, 56
35016 Piazzola sul Brenta (PD) - ITALY
Tel. +39 049 5590358
Fax. +39 049 9600002
info@enoveneta.it

ENOVENETA France

ZAC de Nicopolis, 292 Rue Vermentino
83170 Brignoles - FRANCE
Tel. +33 04 94 04 54 13
Fax. +33 04 94 04 03 33
france@enoveneta.it

ENOVENETA Brasil

Bairro Santa Catarina
Caxias do Sul
Rio Grande do Sul - BRASIL

Rivenditore autorizzato - Dealer

